

Part Number: RS-Wi




Description


The RS-Wi Wireless Gateway is designed for easy integration with data center monitoring and Geist's DCiM systems. The convenient wireless design helps reduce installation costs associated with hard-wired sensors and systems. An auto-discover mechanism detects sensors as they are installed within the monitoring network.

Features

- Wireless design
- 900MHz & 418MHz receivers
- Operates on a mesh network
- Receives transmissions up to 100 feet (30.48m) in open air with the 418MHz Antenna
- Provides direct alarm notification
- Ability to output to Modbus, BACnet, and SNMP

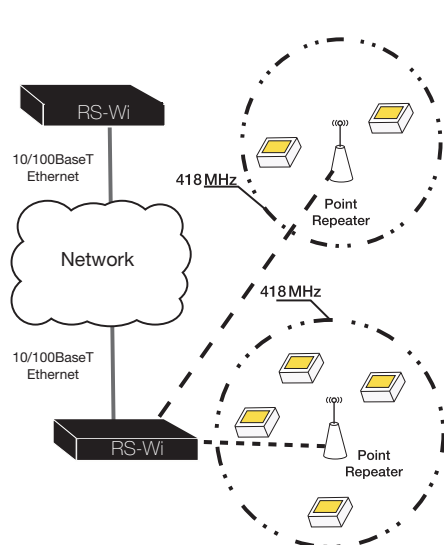

RS-Wi in a Wireless Mesh Network

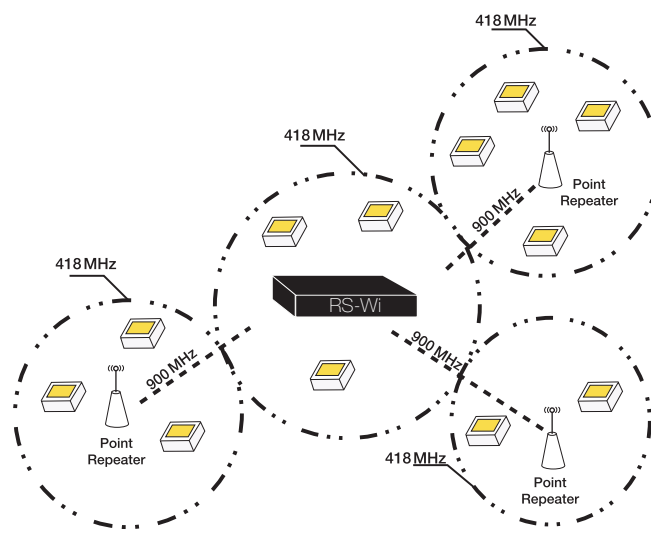

RS-Wi as a Network Repeater

Please note the information contained herein is for informational purposes only. Technical claims listed depend on a series of technical assumptions. Your experience with these products may differ if you operate the products in an environment, which is different from the technical assumptions. Geist reserves the right to modify these specifications without prior notice. Geist makes no warranties, express or implied, on the information contained in this document.

10003202

Geist Americas

800.432.3219
geistglobal.com

Geist DCiM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823 275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com

Hong Kong
+852 90361927
geistglobal.com