# Vertiv<sup>™</sup> Geist<sup>™</sup> rPDU



# **OVERVIEW**

Upgradeable Outlet Level EC Monitored rPDUs provide reliable power distribution to critical IT equipment while delivering a comprehensive view of outlet level power usage via remote network access. Includes environmental monitoring capabilities to obtain realtime environmental metrics. Upgrade the hot-swappable monitoring device on select units to leverage new technologies and accommodate changing business needs.


#### **Benefits**

- Reliable power distribution with local and remote power monitoring options offer quick access to critical power usage information to evaluate energy usage trends and maximize uptime.
- Environmental monitoring
  capabilities with the addition of
  optional environmental sensors
  ensure users have critical
  infrastructure data at their fingertips
  to prevent climate-related equipment
  failure and system downtime.
- Fault-Tolerant
- Every unit is 100% tested for reliability and functionality. Daisy Chaining with RSTP simplifies intelligent rPDU connectivity and ensures data is reported even when a break in the network chain occurs. Supports up to 40 rPDUs.
- Daisy-chain up to 50 devices on a single IP address and reduce deployment time with selfconfiguration of downstream devices.



## Part #: VP6P41A0

Model Number: MPR5M1R6-12CF18-4CS15A5H10-S Category: Monitored Sub Category: Outlet Level Power Configuration: 35A, 208V DELTA, 12.1kW Physical Configuration: 19in / 483mm, Horizontal

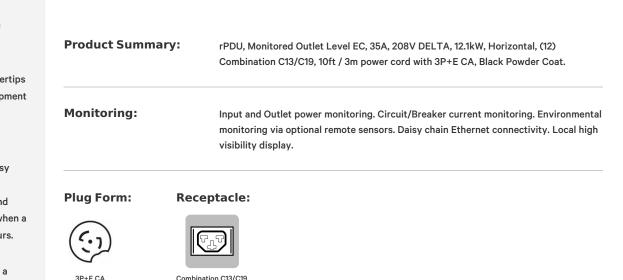

### **Chassis Color Options:**

Vertiv.com | Vertiv Headquarters, 505 N. Cleveland Avenue, Westerville, OH, 43082, USA

© Vertiv Group Corp. All rights reserved. Vertiv<sup>™</sup>, and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

(Quantity: 12)



To discuss color options, contact your local sales representative.

### **Product Specification and Options**

#### **System Features**

System Features	
Monitoring	Input and Outlet power monitoring. Circuit/Breaker current monitoring. Environmental monitoring via optional remote sensors. Daisy chain Ethernet connectivity. Local high visibility display.
Input Monitoring	Total Unit Monitoring (kWh, W, VA, PF) Phase (AB, BC, CA) Monitoring (kWh, W, VA, PF, V, A) Line (A, B, C) Monitoring (A)
	Power Measurements Compliant with ANSI C12.1 and IEC 62053- 21 at 1% Accuracy Class Requirements
Circuit Monitoring	Circuit / Breaker Monitoring (A)
	Circuit/Breaker Current Measurements Independently Tested and Verified at 2% Accuracy
Outlet Monitoring	Outlet Monitoring (kWh, W, VA, PF, V, A)
	Power Measurements Compliant with ANSI C12.1 and IEC 62053- 21 at 1% Accuracy Class Requirements.
Quantity Of Inputs	1
Voltage	200-240V Delta
Current	35A x 3 Phase DELTA
VA per Input (Load Capacity)	12.1kW (200V)
Frequency	50/60Hz
Over Current Protection	(3) 20A Double Pole Magnetic Breakers (10kAIC Rated)
Switch	Breaker/Switch Combination
LCD Touchscreen Display / Auto Oriented	Yes
Indicators - LED(s)	12
Power Cable Wire Gauge	8.0mm²
Power Cable Length	10ft / 3m
Power Entry Location	Left Rear
Plug Type	California Style 50A, 250V, 3P/4W Twistlock
Receptacle/Socket Type #1	Combination C13/C19
- Quantity on Rear	12
- Quantity per Breaker and Phase Combination	4
- Circuit Color ID	2 Circuit - Orongo Croon Plus
- Style	3 Circuit = Orange, Green, Blue
	Banks of 6
- Voltage per Receptacle/Socket	• • •
- Voltage per Receptacle/Socket Network Connection	Banks of 6
	Banks of 6 208V
Network Connection	Banks of 6 208V Dual 10/100/1000Mbps Ethernet DHCP, HTTP, HTTPS, IPv4, IPv6, LDAP, NTP, RADIUS, RSTP,

Vertiv Group Corp. All rights reserved. Vertiv<sup>™</sup>, and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here. Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

IP Reset Button	Yes
Hard Reboot Button	Yes
Serial Connection	RS232 via RJ45
Remote Sensor RJ Connection Jacks	1 (Supports up to 16 Sensors)
Maximum Operating Temperature	60C / 140F
Heavy Steel - Powder Coat Finish	Black
Configuration	19in / 483mm Horizontal Rackmount
Adjustable Mount Brackets	Yes
Country of Origin	USA, TAA Compliant and Buy American Act COTS Compliant
Product Warranty	5-year limited warranty if registered within 120 days of purchase, otherwise warranty defaults to 3 years
Certification/Agency Approvals	RoHS Compliant
Certification/Agency Approvals	METI DENAN
Chassis Dimensions (HxWxD)	1.72in x 17in x 12in / 44mm x 432mm x 305mm
Shipped Weight	18lbs (8.16kg)

Vertiv.com | Vertiv Headquarters, 505 N. Cleveland Avenue, Westerville, OH, 43082, USA © Vertiv Group Corp. All rights reserved. Vertiv ", and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here. Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.