


Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

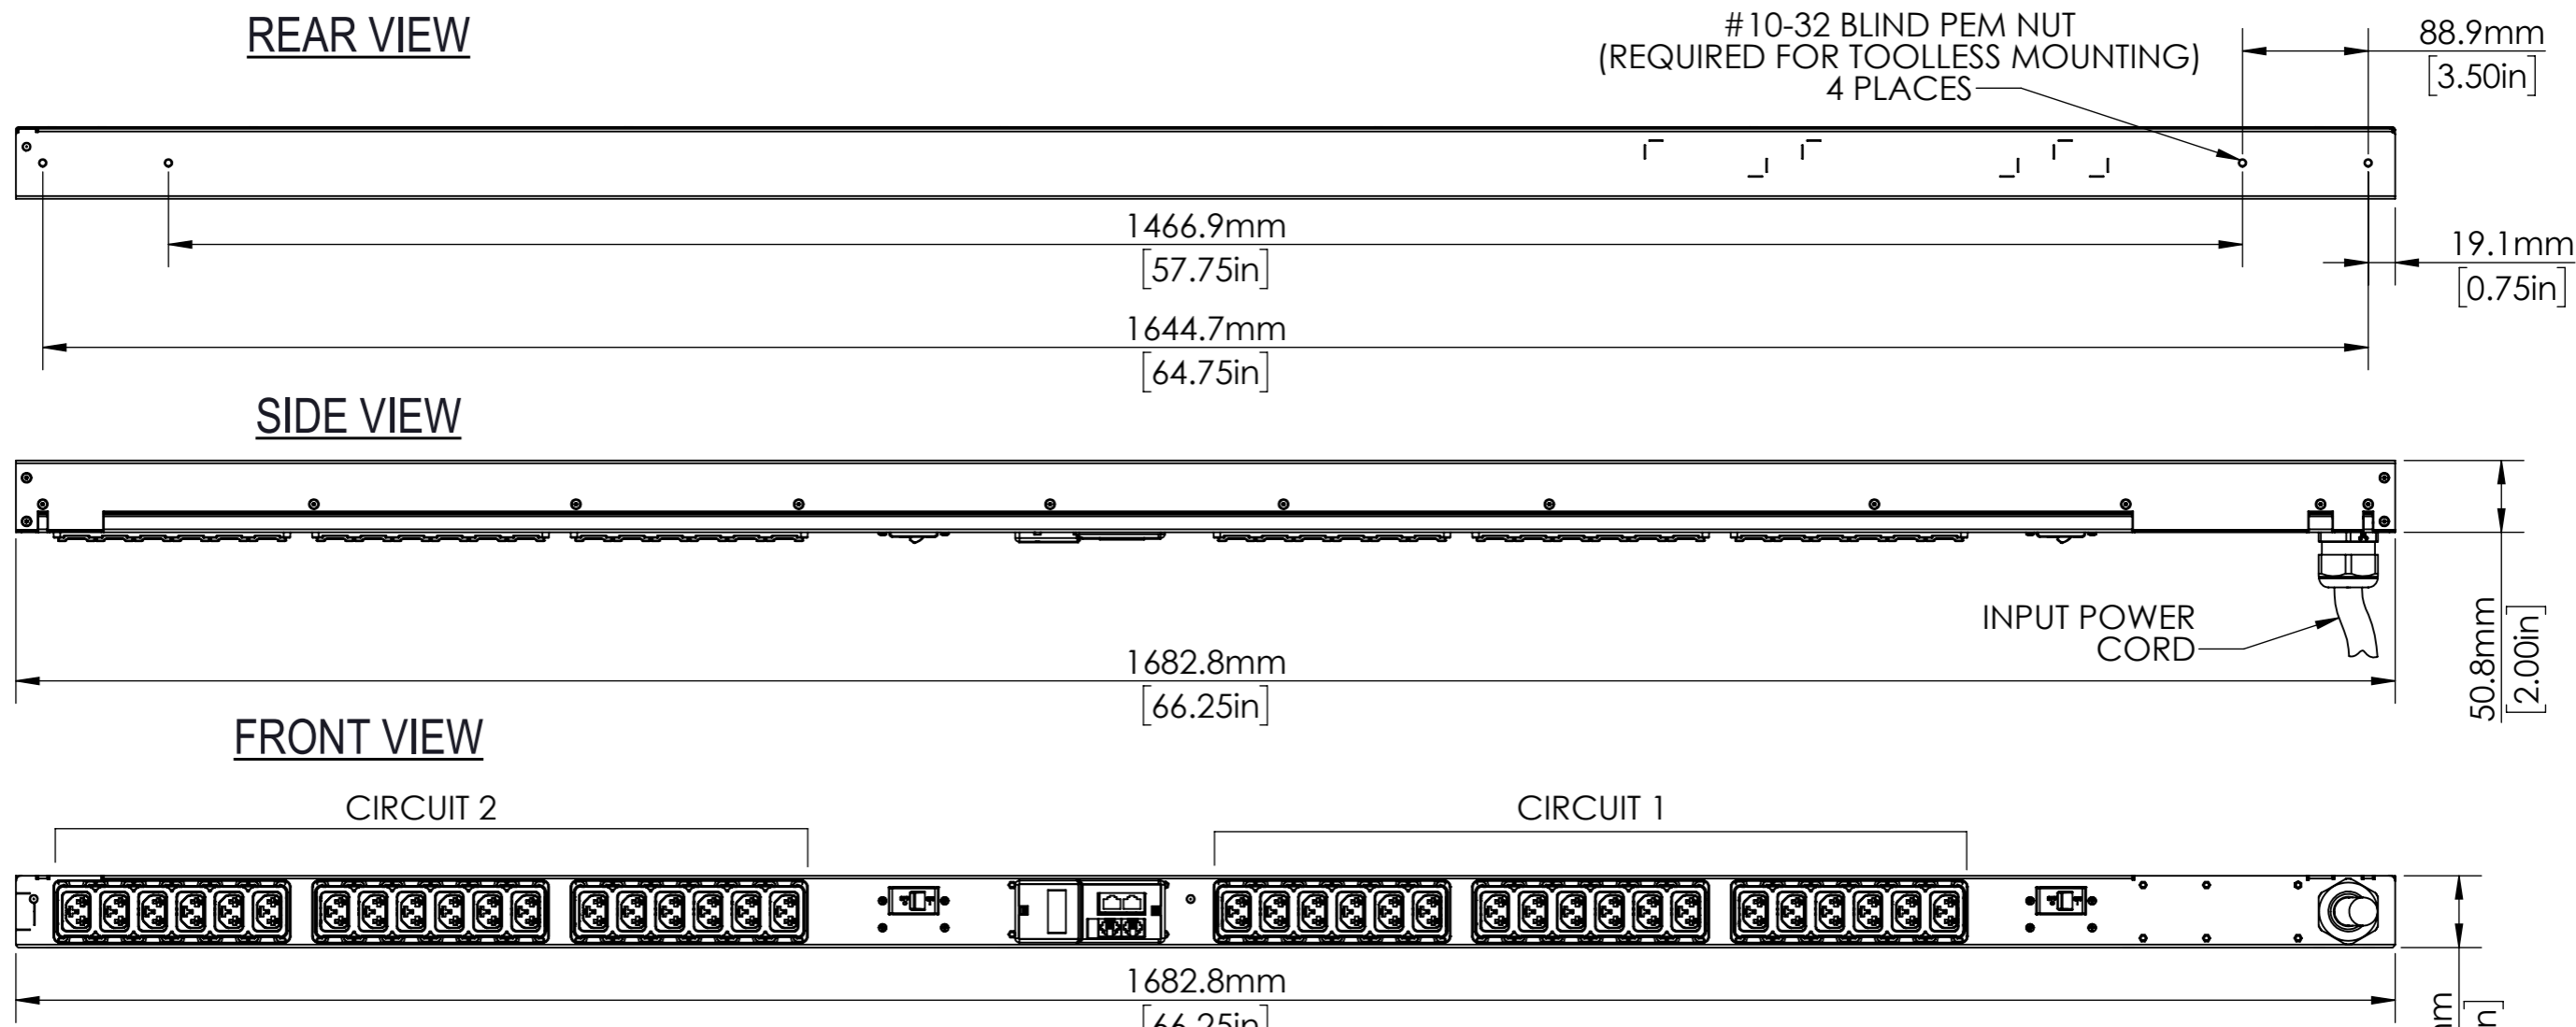

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE	(QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	18xCombination C13/C19		200-240V	12(C14)/16(C20)	16
2	18xCombination C13/C19		200-240V	12(C14)/16(C20)	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft / 3m	NEMA L6-30P	2/PE	50/60	200-240V	24A	24A

AGENCY COMPLIANCE:

RoHS Compliant
 FCC Part 15 Class A Conformance
 UL Listed 60950

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 60C / 140F

NOTES

UNIT DIMENSIONS: 66.25in x 2in x 2in / 1683mm x 51mm x 51mm
 SHIPPED WEIGHT: 16lbs (7.26kg)
 SHIPPING DIMENSIONS: 72in x 9in x 6in / 1829mm x 229mm x 153mm
 Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current



<p>Dimensions in mm</p>		Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: - Weight:	
		-		-		-		-	
Rev.		Change		Date		Name		Bezeichnung / Description	
-		-		30/03/20		JC		rPDU, Monitored Unit Level EC, 30A, 208V, 4.9kW, Vertical, (36) Combination C13/C19, 10ft / 3m power cord with L6-30P, Black Powder Coat.	
-		-		-		-		Zeichnungs-Nr. / Drawing no.	
-		-		-		-		VP43301	
-		-		-		-		Verwendet in / Used in	
-		-		-		-		Blatt/Sheet	
-		-		-		-		1/1	

