


Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

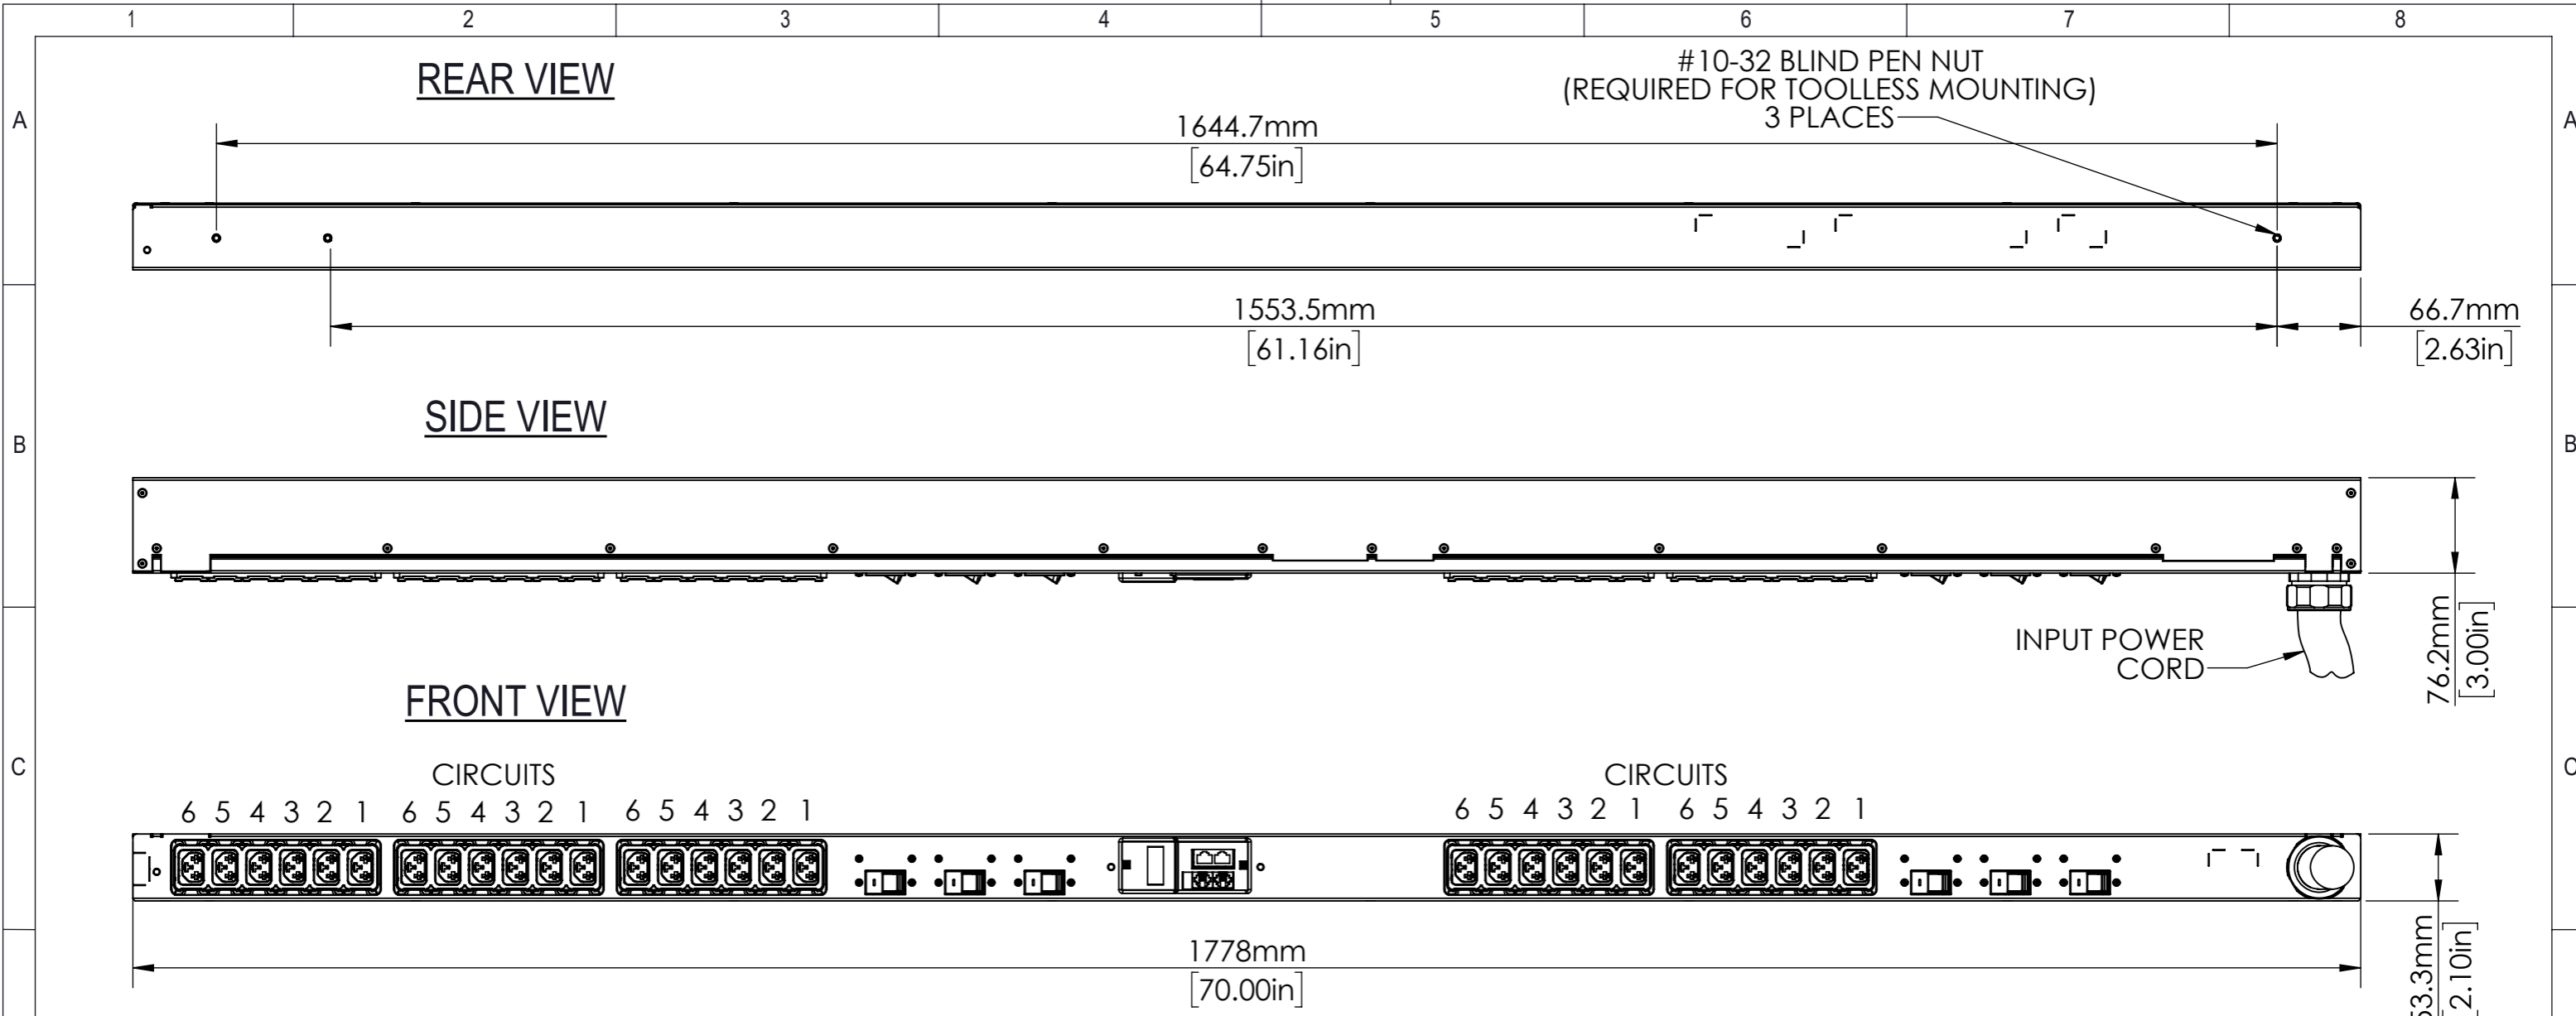

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE	(QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	5xCombination C13/C19		200-240V	12(C14)/16(20)	16
2	5xCombination C13/C19		200-240V	12(C14)/16(20)	16
3	5xCombination C13/C19		200-240V	12(C14)/16(20)	16
4	5xCombination C13/C19		200-240V	12(C14)/16(20)	16
5	5xCombination C13/C19		200-240V	12(C14)/16(20)	16
6	5xCombination C13/C19		200-240V	12(C14)/16(20)	16

AGENCY COMPLIANCE:
 RoHS Compliant
 FCC Part 15 Class A Conformance
 UL Listed 60950

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60C / 140F

NOTES
 UNIT DIMENSIONS: 70in x 2.10in x 3in / 1778mm x 54mm x 76mm
 SHIPPED WEIGHT: 32lbs (14.52kg)
 SHIPPING DIMENSIONS: 87in x 11in x 7in / 2210mm x 280mm x 166mm
 Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft / 3m	IEC 60309 IP44	3/PE	50/60	200-240V	60A	48A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±2% - Circuit/Breaker Current



<p>Dimensions in mm</p>	Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: - Weight: -	
	-		-		-			
Rev.	Change	Date	Name	Bezeichnung / Description rPDU, Monitored Unit Level EC, 60A, 208V DELTA, 17.2kW, Vertical, (30) Combination C13/C19, 10ft / 3m power cord with 3P+E (IP44), Black Powder Coat.				
				Zeichnungs-Nr. / Drawing no. VP46301				Maßstab Scale 1:10
				Verwendet in / Used in -				Blatt/Sheet 1/1

